
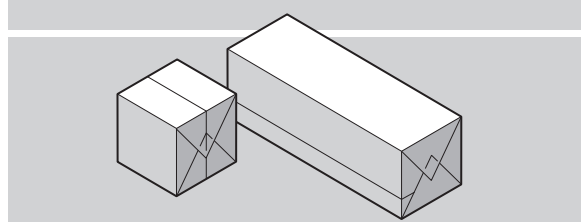
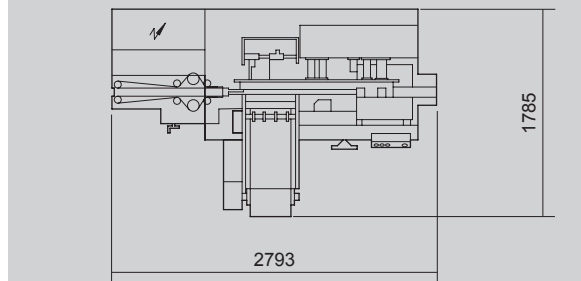
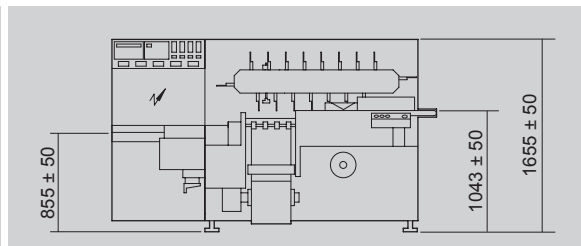
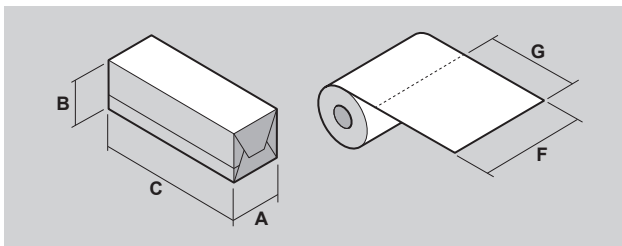


This publication supersedes and replaces any previous edition and revision. All rights reserved.
 No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form
 or by any means, electronic, mechanical, photocopying, recording or otherwise, without permission
 of Tecnicam s.r.l. (Bologna - Italy).
 The technical data are not binding and may be subject to change without prior notice.

RVP

High speed continuous motion overwrapper with plate sealing

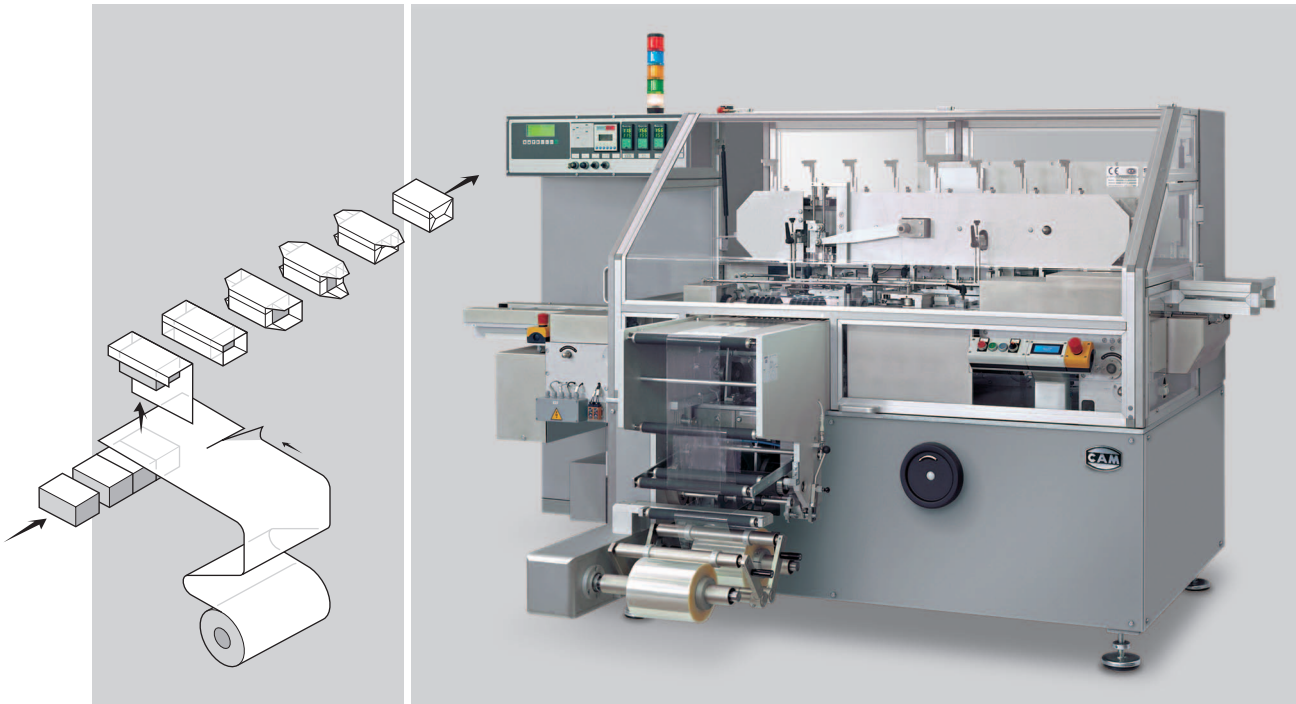

TECHNICAL DATA

| | | |
|------------------|-------------------|----------|
| Mechanical speed | STROKES/1' | max. 150 |
| Power absorption | KW | 6 |
| Air consumption | NI/1' | 50 |
| Air pressure | bar | 6 |
| Gross weight | kg | ~2320 |
| Net weight | kg | ~1950 |

| Size range | min. | max. |
|------------|------|------|
| A | 35 | 120 |
| B | 15 | 90 |
| C | 60 | 190 |
| F | 90 | 335 |
| G | 80 | 280 |

FM-RVP-02-uk (10/11/2014)